



BC DIESEL GENERATORS

KAMLOOPS, BRITISH COLUMBIA, CANADA

TECHNICAL DATA




www.bcdieselgenerators.com

60HZ

Rated Power:35Kw
Standby Power:38Kw

Features

- Compact structure with high-strength chassis;
- Easy operation and maintenance, Low cost;
- Excellent performance damping system;
- Compliance with international electrical safety standards of electrical system;
- 8 hours base tank;
- High-performance maintenance-free batteries with isolation switch
- 50℃ Radiator;
- Top lifting, Forklift bottom hole design, easy to transport;
- Industrial muffler;
- Noise reduction structure , Low noise;
- Convenient power output interface;
- IP56 (control system)
- Customized design for user

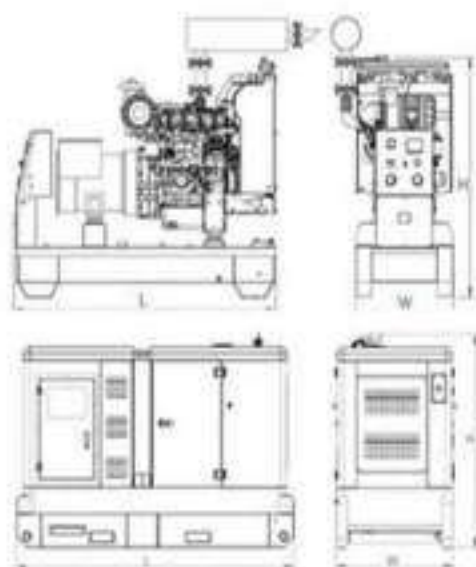

Dimension and Weight

| Generating set model | Silent | Open |
|----------------------|--------|------|
| Length(L) (mm) | 2450 | 1848 |
| Width(W) (mm) | 1050 | 840 |
| Height(H) (mm) | 1670 | 1320 |
| Dry weight (kg) | 1380 | 980 |
| Tank capacity (L) | 160 | 250 |

Genset Technical Data

| | |
|-------------------------------|-----------------------|
| Output frequency | 60 HZ |
| Rated speed | 1800 rpm |
| Prime power | 35KW |
| Standby power | 38KW |
| Rated voltage | 120V/208V or 277/480V |
| Phase | 3 |
| Noise dB(A) @7m | 71 |
| Engine model | 4BT3.9-G1 |
| Alternator model | P1144J |
| Fuel consumption of 100% load | 9.8 Litres/h |
| Fuel consumption of 75% load | 7.4 Litres/h |
| Voltage regulation rate | ±1% |
| Random voltage variation | ±1% |
| Frequency regulation rate | ±5% |
| Random frequency variation | ±0.5% |



Engine Specifications

| | |
|---------------------------------------|----------------------------|
| Engine model | 4BT3.9-G1 |
| Engine manufacturer | Cummins |
| Number of cylinders | 4 |
| Cylinder arrangement | In-line |
| Cycle | Four stroke |
| Aspiration | turbo-charged |
| Bore Stroke (mm mm) | 102 x 120 |
| Displacement (Liter) | 3.9 |
| Compression Ratio | 16.5:1 |
| Prime power/speed (kW/RPM) | 40/ 1800rpm |
| Standby power/speed (kW/RPM) | 45 / 1800rpm |
| Speed governor | Mechanical |
| Cooling system | Forced Water Cooling Cycle |
| Steady speed droop (%) | ≤1% |
| Total lubrication system capacity (L) | 11 |
| Coolant capacity (L) | 7.2 |
| Fuel consumption at 100% load (g/kWh) | 229 (at 1800RPM) |
| Starter motor | DC24V |
| Alternator | DC24V |

Alternator Specifications

| | |
|--|----------------------------|
| Rated frequency | 60 Hz |
| Rated speed | 1800 rpm |
| Alternator model | PI144J |
| Rated output prime power | 35kw |
| Efficiency (%) | 91.1% |
| Phase | 3 |
| Rated voltage | 120v/208v or 277v/480v |
| Exciter type | Self excitation, Brushless |
| Power factor | 0.8 |
| Voltage adjust range | ±5.0% |
| Voltage regulation NL-FL | ±1.0% |
| Insulation grade | H |
| Protection grade | IP23 |
| X _d DIR. AXIS SYNCHRONOUS | |
| X' _d DIR. AXIS TRANSIENT | 0.20 |
| X'' _d DIR. AXIS SUBTRANSIENT | 0.13 |
| X _q QUAD. AXIS REACTANCE | |
| X'' _q QUAD. AXIS SUBTRANSIENT | 0.19 |
| Optional | |
| Optional Alternator brand | Leroy Somer |
| Optional Alternator model | |
| Exciter type | |
| Rated output prime power | |



Control System

DSE-7320MKII

DSE-7320 is an advanced control module based on micro-processor, It is an Auto Mains (Utility) Failure Control Module(AMF), have been designed to start and stop generating sets that include electronic And non-electronic engines. Include the additional capability of being able to monitor a mains (utility) supply. when main is not available, it can automatically start the engine and close generating sets breaker automatically, Accurately measure various operational parameters and display all values and alarms information on the LCD. In additional, it can automatically open breaker, and shutdown the engine after the main supply recovers.

Main Features

- AMF and ATS and communication and expansion function
- Designed to work with electronic or non-electronic or gas engine simultaneously. (support many kinds of engines ECU).
- Manual, Automatic, Test and remote control mode selectable.
- Monitoring and measuring operational parameters of the mains supply and genset.
- Indicating operation status, fault conditions, all parameters and alarms
- Multiple protections and multiple parameters display.
- Includes 12 inputs and 8 outputs. 8 inputs are configurable and 6 outputs are configurable.
- Can be programmed using the front panel or by using the PC software.
- Support twelve languages. The language was edited by customer.
- Graded protection: pre-alarm, shutdown and electrical trip, flexible setting.
- The module can be pre-set for four operating modes and protecting parameters.
- Add DSE890 module, internet network monitoring can be realized.
- The firmware can be updated automatically, so customer can have the latest version.



The control module display

- Generator voltage
- Generator frequency
- Battery voltage
- Engine speed
- Load current
- Generator KVA, KW, PF
- Engine run-time Hours
- Engine oil pressure
- Engine coolant temperature
- Real time clock for time and date, overall runtime